




Cell Type UR18650SAX

Specifications

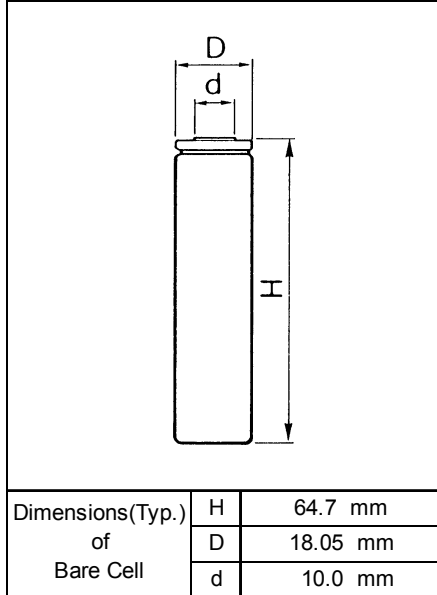


Discharged State after Assembling


| | | |
|----------------------------|-----------|---------------------------------------|
| Nominal Capacity | | Min.1250mAh |
| Nominal Voltage | | 3.7V |
| Charging Method | | Constant Current -Constant Voltage |
| Charging Voltage | | 4.2V |
| Charging Current | | Std.875mA |
| Charging Time | | 3.0hrs. |
| Ambient Temperature | Charge | 0~+40°C |
| | Discharge | -20~+60°C |
| | Storage | -20~+50°C |
| Weight (Max.) | | 45.0g |
| Dimensions (Max.) | (D) | 18.10mm |
| | (H) | 64.80mm |
| Volumetric Energy Density | | 277Wh/l |
| Gravimetric Energy Density | | 103Wh/kg |

*Maximum size without tube

Discharge rate characteristics

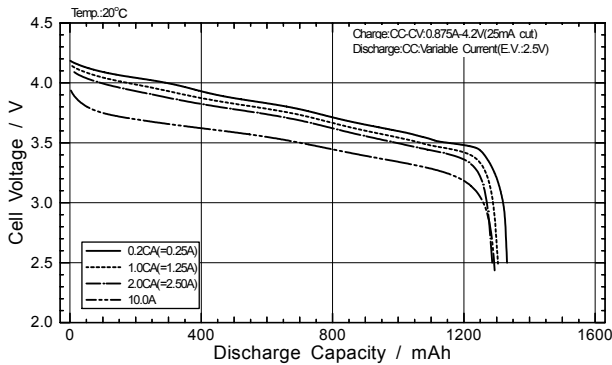

Discharge temperature characteristics

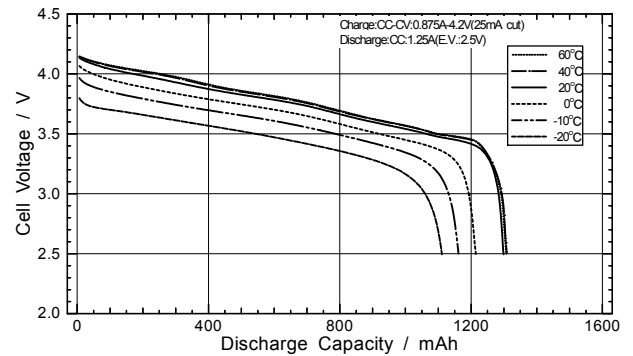

Charge characteristics

